	Please type a plus sign (+) inside this box → +	Approved for use through 09/30/2000. OMB 0651-0032 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
		to respond to a collection of information unless it displays a valid OMB control number Attorney Docket No. 501.38112X00
	UTILITY	First Inventor or Application Identifier Hiromi SUTOU
*	PATENT APPLICATION	Title See 1 in Addendum
	TRANSMITTAL (Only for new nonprovisional applications under 37 C.F R. § 1.53(b))	Express Mail Label No.
535 U. 01/27	APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	Assistant Commissioner for Patents ADDRESS TO: Box Patent Application
S. PIO	* Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing) 2. X Specification (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix	5. Microfiche Computer Program (Appendix) 6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. Computer Readable Copy b. Paper Copy (identical to computer c
	- Background of the Invention	ACCOMPANYING APPLICATION PARTS
	- Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. X Drawing(s) (35 U.S.C. 113) [Total Sheets 27] 4. Oath or Declaration [Total Pages 2] b. Copy from a prior application (37 C.F.R. (for continuation/divisional with Box 16 completed inventor(s) named in the prior application (37 C.F.R. § Signed statement attached deleginventor(s) named in the prior application (37 C.F.R. § 1.63(d)(2) and 1 FNOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.27), If ONE FILED IN A PRIOR APPLICATION, check appropriate by	sting slication, 1.33(b). LENTITY EXCEPT 13. Statement(s) Status still proper and desired Status still proper and S
		-in-part (CIP) of prior application No:/ Group / Art Unit:

amendment: For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts. 17. CORRESPONDENCE ADDRESS 020457 Correspondence address below X Customer Number or Bar Code Labe! (Insert Customer No or Attach bar code label here) Name Address Zıp Code State City Fax Telephone Country 29,621 Registration No. (Attorney/Agent) Carl D. Brundidge Name (Print/Type) 1-27-00 Signature Burden Hour Statement: This form is estimated to take 0.2 hours to complete Time will vary depending upon the needs of the individual case. Any

PTO/SB/05 (4/98)

in prior application

comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Addendum

DATA TRANSFER METHOD, APPARATUS, AND RECORDING MEDIUM FOR USE IN HIERARCHICAL SYSTEM

Title of the invention: DATA TRANSFER METHOD, APPARATUS,
AND RECORDING MEDIUM FOR USE IN HIERARCHICAL SYSTEM

Background of the Invention

The present invention relates generally to a data transfer method, a data transfer apparatus, and data recording medium for use in hierarchical systems.

Referring to FIG. 1, there is shown a system in which a managed system returns static information (namely, unique information having little change in result) to a requirement by a manager system for information acquisition. To be more specific, an information acquisition requirement by a manager system (101) is sent to a managed system (106) through submanager systems (102 through 105) in a relay manner.

Likewise, a response result to the information acquisition requirement is also returned to the manager system through the submanager systems in a relay manner. At this time, an information acquisition requirement and its response result are not transferred over different routes.

Referring to FIG. 2, each of the submanager systems

(202 through 205) is composed of a manager capability and a submanager capability and may issue an information acquisition requirement like the manager system, performing the same information acquisition requirement operation as

with the case of the manager system. One example of a system having the above-mentioned characteristics is a system in a hierarchical configuration for acquiring the property information on a submanager system from a manager system as shown in FIG. 3.

Summary of the invention

If a manager system and submanager systems issue a same information acquisition requirement to a managed system, the same information acquisition requirement and its reply result flow on a route multiple times, causing redundancy (in the portions in which the arrows of information acquisition requirement and its replay result overlap as shown in FIG. 1) and sometimes overloading the network.

In order to solve the above-mentioned problems, the present invention executes the following means. If an information acquisition requirement is made from the manager system to a managed system, it is determined in the submanager systems on the routes to that managed system whether or not to issue a same information acquisition requirement.

If the same information acquisition requirement is to be issued, it is recognized in advance in the submanager systems. When the information acquisition requirement was received by the managed system and it has returned a

response result, the submanager systems acquire the response result if it is necessary, and pass the response result to the manager system.

This configuration can prevent same data from flowing over a route in a duplicated, redundant manner. In addition, by having each submanager system store in advance the response results for particular information acquisition requirements, the submanager system can pass the stored response result to a particular information acquisition requirement to the manager system or a submanager system in an upper layer that issued the requirement. Consequently, this configuration reduces the data traffic on the route from that submanager system to the managed system.

Brief description of the drawings

These and other objects of the invention will be seen by reference to the description, taken in connection with the accompanying drawing, in which:

- FIG. 1 is a diagram illustrating the configuration of a system to which the present invention is applicable and the flows of data transfer;
- FIG. 2 is a diagram illustrating the configuration of a system to which the present invention is applicable;
- FIG. 3 is a diagram illustrating one example of a system configuration for managing property information in a multi-layer system;

- FIG. 4 is a diagram illustrating a state in which each of the manager system and submanager systems has items;
- FIG. 5 is a diagram illustrating a method of merging items in each of the manager system and submanager systems;
- FIG. 6 is a diagram illustrating a method of updating property information in each of the manager system and submanager systems;
- FIG. 7 is a diagram illustrating the structure of a DB having attributes;
- FIG. 8 is a diagram illustrating the configuration of a program in the manager system;
- FIG. 9 is a diagram illustrating one example of the item edit screen in the manager system;
 - FIG. 10 is a flowchart indicative of item editing;
- FIG. 11 is a flowchart continued from the flowchart of FIG. 10;
- FIG. 12 is a diagram illustrating the initial state of items of each of the manager system and submanager systems;
- FIG. 13 is a diagram illustrating a state in which items are initialized;
- FIG. 14 is a diagram illustrating a state in which items are merged;
- FIG. 15 is a flowchart indicative of the merge processing;

- FIG. 16 is a diagram illustrating a state in which property information is updated;
- FIG. 17 is a flowchart indicative of the update processing;
- FIG. 18 is a diagram illustrating a state in which items are initialized;
- FIG. 19 is a diagram illustrating a state in which items are merged;
- FIGS. 20 and 21 are flowcharts indicative of the merge processing;
- FIG. 22 is a diagram illustrating a state in which items are initialized;
- FIG. 23 is a diagram illustrating a state in which items are merged;
- FIG. 24 is a flowchart indicative of the merge processing;
- FIG. 25 is a diagram illustrating a state in which property information is updated;
- FIG. 26 is a flowchart indicative of the update processing;
- FIG. 27 is a diagram illustrating a state in which items are initialized;
- FIG. 28 is a diagram illustrating a state in which items are merged; and
- FIG. 29 is a diagram illustrating a state in which property information is updated.

Detailed description of preferred embodiments

This invention will be described in further detail by way of example with reference to the accompanying drawings. For embodiments of the invention, systems are used for example for managing the property information of managed systems in a multilayer network environment as shown in FIG. 3 (although not shown in FIG. 3, business hubs such as business offices, branches, and sales offices and the departments in each of these hubs also have multiple submanager systems and managed systems). It is assumed here that the submanager systems in the multilayer network environment be subordinate to the manager system and the submanager systems in every layers does not depend on the information about the other submanager systems in that layer. The following outlines the flow of processing.

Now, referring to FIG. 4, the items of information required by the manager system and the submanager systems in every layers are defined. Next, as shown in FIG. 5, the manager system issues an information acquisition requirement, and by repeating the merging of the items of required information and downloading item files in the submanager systems, the manager system requires information from the managed system.

Referring to FIG. 6, a file containing the result of property information inputted in the managed system is uploaded into the manager system through the submanager

systems. In the course of this uploading, each submanager system updates the information with respect to the items defined by itself and uploads the other items to the upper submanager system.

It should be noted that the embodiments are property information managing systems as described above, but the present invention is also applicable to systems that handle other kinds of information to be required for acquisition.

Embodiment 1:

Referring to FIG. 8, there is shown a block diagram of the program in each submanager system. The submanager system comprises a main manager program (802), a merge processing block (hereafter referred to as merge-process) (805) that receives an item file composed of item groups downloaded from the upper-layer manager system and merges the received items, an update processing block (hereafter referred to as update-process) (804) that receives a result file composed of the items and property information from the lower-layer system (the lower-layer manager system or the managed system) and updates the property information, an edit processing block (hereafter referred to as editprocess) (803) that edits items managed in its own system, a user terminal (801) on which information display and operation are executed, and a DB (Database) (806) storing the items and property information. The structure of the DB is as shown in FIG. 7 in which each item has an

attribute field.

To this attribute field, one of three statuses is set: "0" an item managed by the system in a current layer (hereafter also referred to as "this system") indicative that the item is managed in the layer of this current system; "1" an item managed by upper system indicative that the item is managed by the upper system; and "2" a common item indicative that this item is common to this system and the upper system. Basically, the submanager system in each layer can be realized by the similar configuration to that of the submanager systems in the other layers. However, the program of the manager system at the top of the multilayer environment has no merge-process.

All the processing operations mentioned above can be executed in concurrently. In the concurrent processing, there is a time in which DB update-processes overlap. It is assumed that this portion of overlapped time is exclusively controlled in advance (this, however, is omitted from the description of the processing flow below).

First, edit-process is described. In edit-process, the contents of the DB of this system are displayed and edited. For displaying the property information stored in the DB, only the items other than those managed by the upper system are displayed.

The output of edit-process can also be directed to a file or a printer in a free form in addition to the display

device of the user terminal. In edit-process, addition and deletion of items and attribute change of items can be performed. FIG. 9 shows one example of the edit screen. FIGS. 10 and 11 show flowcharts indicative of the edit operation. A list of items and their attributes are displayed on the display device of the user terminal (S301) and the system wait for an input operation by the user (S302).

When the edit operation has been completed and the end thereof is instructed by the user (S303), this system extracts the items from the DB of this system and downloads the item file containing the extracted items to the lower submanager system or the managed system directed connected to this system (S304), upon which the editing is ended. If no editing has been performed, the file downloading is not performed. If the addition of an item is instructed (S305), this system adds the specified item to its DB, specifies the attribute of the added item as the item managed by this system ("0") (S306), and waits for another operation to be inputted by the user (S302). If the deletion of an item is instructed (S307), this system deletes the specified item from its DB directly provided that the attribute of the item to be deleted is the item managed by this system ("0") (the property information is also deleted if it is set for the item) (S309). If the attribute is the item managed by upper system ("1"), this system outputs an error message

(S311). If the attribute is the common item ("2"), this system changes the attributes to the item managed by upper system ("1") (S310).

When the above-mentioned processing has been completed, this system waits for an operation to be inputted by the user (S302). If the change of an item attribute is instructed (S312), the attribute of that item is changed from the item managed by upper system ("1") to the common item ("2"), or if the instruction is vice verse, the attribute of that item is changed (S314) from the common item ("2") to the item managed by upper system ("1"), outputs error message (S315) and waits for operation to be inputted by the user.

Where other instruction other than those stated above, this system outputs error message (S316) and waits for operation to be inputted by the user (S302). It is practicable to determine particular button operations that will cause an error and deactivate the buttons concerned in advance to prevent the user from operating them.

The following describes merge-process with reference to the transition diagrams shown in FIGS. 12 through 14 and the flowchart shown in FIG. 15. It is assumed that merge-process is performed in a lower manager system shown in the transition diagrams. In the initial state, this manager system is waiting for the downloading of data from the upper manager system or the manager system (S001). At this

moment, the items in the DBs of the upper and lower manager systems are as shown in FIG. 12.

It should be noted that, for the convenience of description, the items from the upper manager system have already been prepared in the lower manager system (items A through C and F).

First, when an item file has been downloaded from the upper manager system, this lower manager system deletes all items having the attribute of the item managed by upper system ("1") (S002). Next, this system changes the common item ("0") to the item managed by this system ("0") (S003). The states of the items in the DBs of the upper and lower manager systems are shown in FIG. 13.

Then, this lower manager system opens the downloaded item file (1304) and reads the items (S004). When all items have been read from the item file (S005), this system prepares an item file containing the extracted item data from its own DB and downloads the prepared item file to the directly connected submanager system or managed system (S008) in lower layer and waits for another downloading operation (S008 to S001).

This submanager system reads the items one by one in the item file (1304) and checks its own DB for any same item (S006). If the same item is found, this system updates its DB by changing the attribute of the same item to the common item ("2") and starts reading the next items

(S009 to S004). If there is no same item, this system adds the read items to its DB and sets the attribute of the read item to the item managed by upper system ("1") and starts reading the next items (S007 to S004).

FIG. 14 shows one example of the DB update operation performed in accordance with the flowchart of merge-process. As shown, item A, item B, and item C are downloaded to this system (lower manager system) from its upper manager system to be merged with item C, item D, and item E held in this system, the result of merge-process being displayed in the after-change table. Then, item C through item B are downloaded to the system in further lower layer connected to this system.

The following describes update-process with reference to the transition diagrams shown in FIGS. 14 and 16 and the flowchart shown in FIG. 17. In the initial state, this system is waiting for the uploading of a result file from its lower-layer system (S101). The state of the items of the DB of this system is as shown in the afterchange table shown in FIG. 14.

First, this system opens the uploaded result file 1 (1606) and reads the items and property information contained in the file (S102). Next, this system searches its DB for the read item. If the attribute of the detected item is the item managed by upper system ("1") (S104), then this system writes the item and the property information in

the result file 1 to a result file 2 (1605) to upload it to the upper manager system (S105) and starts reading next item and property information (S102). If the attribute of the detected item is other than the item managed by upper system ("1") (S104), this system updates the property information of the item concerned in the DB of this system (S107).

If the attribute of the detected item is the common item ("2") (S108), this system writes the item and property information in the result file 1 (1606) to the result file 2 (1605) to upload it to its upper manager system and starts reading next item and property information (S102). When this system has read all items and property information, it uploads the prepared result file 2 (1605) to the upper manager system (S106) and then waits again for the uploading of the result file 1 (1606) from the lower-layer system (S101).

At this moment, the state of the DB is as shown in FIG. 16. FIG. 16 shows that the property information about item C, item D, and item E of the result file 1 (1606) are reflected on the DB, and item A, item B, and item C have been uploaded to the upper system.

Because the attribute of item C is the common item, it is reflected (updated) on the DB and uploaded to the upper system, thereby preventing the duplication of item C from being occurred. Thus, the above-mentioned method

prevents data of any same item between the manager system and the managed system from being transferred in a duplicated manner, thereby enhancing the efficiency of the data transfer.

Embodiment 2:

The processing to be performed is generally in the same manner as that of the embodiment 1, except for the implementation method and merge-process. Therefore, the following describes mainly Merger-Process with reference to the state transition diagrams shown in FIGS. 18 and 19 and the flowchart shown in FIG. 20. The other processing will be described only in the portions different from those of the embodiment 1. Now, referring to FIG. 18, this system attaches an operation flag to each item to be downloaded. To this operation flag indicating operation status, either "A" indicative of addition or "D" indicative of deletion is set (1805).

The upper manager system stores the information edited in edit-process of items (processing for storing operation history is added behind each operation processing described in the flowcharts shown in FIGS. 10 and 11) and adds the operation flag to each item in the item file (1805) to be downloaded upon completion of edit-process (only the items manipulated in S304 of FIG. 10 are extracted and item adding processing is performed for the item preparing processing).

As shown in FIG. 18, if items are added, "A" is attached to item D and item X to be added and "D" is attached to item A to be deleted. First, referring to FIG. 20, when the item file is downloaded from the upper manager system in download-waiting state (S201), this system reads the operation flag and its item (S202). If the operation flag is deletion ("D") and the attribute of this item is the item managed by upper system ("1"), this system deletes the item from the DB and reads a next item (S204, S205, S208, A).

If the operation flag is deletion ("D") and the attribute is the common item ("2"), this system changes the attribute from the common item to the item managed by this system ("0") and reads a next item (step S204, S205, S206, S209, A). If the operation flag is addition ("A") and there is no item, this system adds an item to the DB, sets the attributes of this item to the item managed by upper system ("1"), and reads a next item (S204, S210, S212, A).

If the operation flag is addition ("A") and the attribute of the item existing in this system is the item managed by this system ("0"), this system sets the attribute of this item to the common item ("2") and reads a next item (S204, S210, S211, S213, A). Then, for the other combinations of statuses than those mentioned above, this system does nothing but reading a next item (A).

Having read all items, this system downloads the

item file that was received from the upper manager system to all the submanager systems and managed systems in the lower layer connected thereto without change (S207) and waits for the downloading of another item file from the upper manager system (S207 to C).

This series of processing operations results in a table whose status shown in FIG. 19. FIG. 19 shows that item A deleted by the upper manager system and item D and item X added by the upper manager system are downloaded, the downloaded items are merged with the items held in the lower manager system, item D is newly added as the item managed by upper system, and the attribute of item X is changed to the common item.

Thus, the second embodiment prevents a same item from being transferred in a duplicated manner and requires only a constant size of the item file to be downloaded which is a difference equivalent to the change made to the file.

Embodiment 3:

In the embodiment 1 and the embodiment 2, the same items are managed by use of attribute information in each manager system. In the embodiment 3, each manager system has only the items that are managed by this system (on its own) only and has no attribute information, and each of the managed systems holds a requirement system (the program configuration for the embodiment 3 is the same as that of

the embodiment 1).

First, merge-process will be described with reference to the flowchart shown in FIG. 24 and the status transition diagrams shown in FIGS. 22 and 23. It is assumed that the following description is made with reference to the lower manager system shown in these transition diagrams. In the initial state, this system is waiting for the downloading from the upper manager system or the manager system (S401).

The states of the items in the DB of each manager system are as shown in FIG. 22. For the system names, "SYSTEM" is set to the upper manager system and "SITE" to this lower manager system. The upper system holds items A, B, and C and this system holds items C, D, and E.

Each item file to be downloaded is composed of items and manager system names for managing these items as shown in FIG. 23. When an item file 1 (2305) has been downloaded from the upper manager system to this system in the download-waiting state (S401), this system reads an item and its manager system name from the downloaded file (S402).

If the read item is found also in the items managed by this system (S404), this system adds the name of this system as a manager system to the duplicating name and its manager system name and writes the result to an item file 2 (2307) to be downloaded to the lower-layer system (S408). If no duplicating item is found, this system writes the

items and their manager system names to the item file 2 (2307) without change, to be downloaded to the lower-layer system (S405). Having read all items (S403), this system extracts the items managed by this system that are not duplicating, adds the name of this system to each of these items as the manager system name, writes these items to the item file 2 (2307) to be downloaded to the lower-layer system (S406), downloads the prepared item file 2 (2307) to the lower-layer system (S407), and waits for the downloading of the item file 1 (2305) from the upper manager system (S401).

FIG. 23 shows the downloading of the item files.

Because item C is duplicated in both the upper manger system (SYSTEM) and the lower manager system (SITE), system names "SYSTEM" and "SITE" are set as manager system names.

Each managed system holds the item file in the form of an item file to be downloaded (in other words, the managed system holds the information about which item is to be returned to which manager system).

When property information has been inputted at the managed system, a result file is prepared in combinations of item, property information, and manager system name. The prepared result file is uploaded to the upper system of the managed system. The following describes update-process with reference to the flowchart shown in FIG. 26 and the status transition diagram shown in FIG. 25.

In the initial state, this system (SITE) is waiting for the uploading of a result file 1 (2505)(SS01) from the system immediately below. When the result file 1 (2505) has been uploaded, this system opens it and reads the items, property information, and manager system names for one entry (S502).

If the name of this system is included in the manager system names of that entry (S504), this system updates the property information in its DB (S507), deleting the name of this system from the manager system names (S508). If another system name exists in the manager system names (S509), this system writes the entry with the name of this system removed to a result file 2 (2507) to be uploaded as a result file to its upper manager system (S505).

If the name of this system is not included in the read entry from the beginning, this system does not update the entry and writes the entry as it is to the result file 2 (2507) (S505). Upon reading all entries (S503), this system uploads the prepared result file 2 (2507) to its upper manager system (S506) and waits again until the result file 1 (2505) is uploaded from its lower-layer system (S501).

FIG. 25 shows the flow of the result files, in which property items A, B, C, D, and E are uploaded as a result from its lower-layer system and this system (SITE) updates

its DB with respect to items C, D, and E, uploading the result file containing items A, B, and C to its upper manager system (SYSTEM).

Because item C is common to this system and its upper system, this system updates its DB and uploads the result file, thereby preventing the duplication of item C from occurring. It should be noted that edit-process is executed only to edit the items of this system and therefore no special processing is executed. For this reason, the description of edit-process is skipped.

Thus, the embodiment 3 prevents the duplicated transfer of items common to the manager system and the managed system to realize efficient data transmission in a method different from those of the embodiments 1 and 2.

Embodiment 4:

This embodiment, in addition to the capabilities of embodiment 1, provides a capability of allowing each submanager system to define in advance default items and their property information. The following describes this method with reference to FIGS. 27 through 29.

FIG. 27 shows the initial states of the manager system and submanager systems in which the manager system of the head office prepares items "business office code", "department code", "name", "extension number", the submanager system of the business office defines "business office code" and the submanager system of the department

defines "department code" as defaults. Addition and deletion of default items can be executed as a part of edit-process.

FIG. 28 shows a processing flow in which an item file is downloaded to each system. An item file (2805) is downloaded from the manager system of the head office to the submanager system of the business office. The submanager system of the business office compares the item names in the item file with the default item names. If a matching name is found, the submanager system stores the matching item and its property information into the default Then, the submanager system of the business office downloads an item file (2808) of "department code," "name", and "extension number" with "business office code" removed therefrom to the submanager system of the department. The submanager system of the department processes "department code" in the same manner and downloads an item file (2811) composed of "name" and "extension number" and sets property information for that item. It should be noted that the items and their property information stored in the default DB are deleted when new items are downloaded from the upper manager system.

FIG. 29 shows the processing flow in which result files are uploaded. When property information is inputted in the managed system, the managed system uploads a result file to the submanager system of the department. The

submanager system of the department adds the item and property information in the default DB to the result file and uploads it to the submanager system of the business office. The submanager system of the business office carries out the same processing as described above, uploading the result file to the manager system of the head office, the result file storing the property information of all items. The current embodiment can be actually implemented by adding particular processing to the processing flow of embodiment 1.

First, in merge-process, this system adds processing in which the contents of the default DB are all deleted upon downloading of an item file (this processing is added under S003 of FIG. 15). This system checks the downloaded items for an default item. After entering property information of the same time as the default item into the default DB. This system adds processing in which no file is downloaded to the lower-layer system (this processing is added under S005 of FIG. 15). Then, when the information is uploaded in update-process, this system adds processing in which the items and their default values are additionally written to the result file to be uploaded to the upper manager system (this processing is added so that it is executed when the file has all been read in S103 of FIG. 17). Thus, embodiment 4 can reduce the amount of data transfer by the items defined by default.

Embodiment 5:

In embodiment 5, this system determines in the method of embodiment 4 whether there is any default item in the items downloaded by the submanager system to this system. If a default item is found, this system enters the property information of the same item into the default DB. Then, if there is no more item to be downloaded to the manager system or the managed system in lower layer (if this system has set the default items for all items), this system extracts the items and property information from the default DB, prepares a result file, and uploads it to the upper manager system.

In the actual implementation method, embodiment 5 can be realized by adding particular processing to the flow of embodiment 1 on which the capabilities of embodiment 4 are implemented. In merge-process, this system determines whether there is any item file which is downloaded to the lower-layer manager system or the managed system. If such an item file is found, this system downloads it. If no such item file is found, this system adds processing in which all contents of the default DB are extracted, a result file is prepared to be uploaded to the upper manager system, and uploads the prepared result file to the upper system (this processing is added under S008 of FIG. 15).

The method of embodiment 5 can prevent the data transfer from the submanager system which has completed the

input of property information by items defined by default to the managed system.

In addition, this method enhances the efficiency of data transfer over one route of network in a hierarchical network environment, which in turn realizing the efficient data transfer over the entire network.

While the preferred embodiments of the present invention have been described using specific terms, such description is for illustrative purposes only, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the appended claims.

CLAIMS:

1. A method of data transfer in a hierarchical network comprising the steps of:

receiving first data including an item from an upper system;

updating attribute information corresponding to said item held in a current system and adding second data held in said current system to said first data; and

sending said first data and said second data to a lower system.

2. The method of data transfer as claimed in claim 1, further comprising the steps of:

if said item included in said received first data exists in said current system, updating said existing item;

changing attribute information for said item held in said current system to a value indicative of common data;

if said item does not exist in said current system, adding said item to said current system; and

changing said attribute information for said item held in said current system to a value indicative of data which is prepared by said upper system.

3. The method of data transfer as claimed in claim 1, still further comprising the steps of:

receiving at least one of edit requirements for addition and deletion of said item; and

changing attribute information for said item held in

said current system according to the change of said item and item content of said current system corresponding to said item.

4. A method of data transfer in a hierarchical network comprising the steps of:

receiving an item and data stored in first data coming from a lower system;

if said item exists in a database of said current system and attribute information corresponding to said item indicates a value managed by an upper system, reading data included in said first data and storing the read data into second data; and

sending said second data to said upper system.

- 5. The method of data transfer as claimed in claim 4, wherein, if said attribute information corresponding to said item indicates a value not managed by said upper system, said data is stored in said current system.
- 6. The method of data transfer as claimed in claim 1, wherein said first data includes an operation flag indicative of either one of item addition or item deletion, and addition of said item to said current system is determined on the basis of said operation flag and information indicative of existence or absence of said item in said current system.
- 7. The method of data transfer as claimed in claim 1, wherein said second data holds manager system information

indicative of that said item is the data associated with said current system and whether said item is processed or not is determined on the basis of said manager system information.

8. A method of data transfer in a hierarchical network comprising the steps of:

receiving from a lower system an item and data included in first data and manager system information indicative of whether said item is the data associated with a current system;

if said manager system information is the data associated with said current system, updating a content of an item held in said current system by use of said data;

if said manager system information has information indicative of another system, deleting the information indicative of said current system;

forming second data by said item, said data, and the manager system information with the information indicative of said current system deleted; and

sending said second data to an upper system.

9. A method of data transfer in a hierarchical network comprising the steps of:

receiving first data from a lower system;

forming second data by an item corresponding to default information held in a current system and data included in said first data; and

sending said second data to an upper system.

10. A method of data transfer in a hierarchical network comprising the steps of:

receiving first data from an upper system;

storing into a current system an item included in said first data, said item corresponding to default information held in said current system;

storing data with said item corresponding to said default information of said current system deleted from said first data into second data; and

sending said second data to a lower system.

- 11. The method of data transfer as claimed in claim 10, wherein data to be sent to said upper system forms said second data when there is no more data to be sent to said lower system after deleting said item corresponding to said default information of said current system from said first data and said second data is sent to said upper system.
- 12. A data transfer apparatus for use in a hierarchical network comprising:
- a receiving block for receiving first data including an item from an upper system;
- a merge processing block for updating attribute information corresponding to said item and held in a current system and adding second data held in said current system to said first data; and
 - a sending block for sending said first data and said

second data to a lower system.

- 13. The data transfer apparatus as claimed in claim 12, wherein said merge processing block updates said existing item, if said item included in said received first data exists in said current system; changes attribute information for said item held in said current system to a value indicative of common data; adds said item to said current system, if said item does not exist in said current system; and changes said attribute information for said item held in said current system to a value indicative of data which is prepared by said upper system.
- 14. The data transfer apparatus as claimed in claim 12, further comprising:

an edit processing block for receiving at least one of edit requirements for addition and deletion of said item and changing attribute information for said item held in current system according to the change of said item and item content of said current system corresponding to said item.

15. A data transfer apparatus for use in a hierarchical network comprising:

a receiving block for receiving an item and data stored in first data coming from a lower system;

an update processing block for, if said item exists in a database of a current system and attribute information corresponding to said item indicates a value managed by an

upper system, reading said data included in said first data and storing the read data into second data; and

a sending block for sending said second data to said upper system.

- 16. The data transfer apparatus as claimed in claim 15, wherein, if said attribute information corresponding to said item is a value indicative of common manager item, said updating processing block stores said data into said current system.
- 17. The data transfer apparatus as claimed in claim 12, wherein said first data includes an operation flag indicative of either one of item addition or item deletion, and said merge processing block determines whether or not to add said item to said current system on the basis of said operation flag.
- 18. The data transfer apparatus as claimed in claim
 12, wherein said second data holds manager system
 information indicating that said item is data associated
 with said current system and said merge processing block
 determines whether or not to process said item on the basis
 of said manager system information.
- 19. A recording medium readable by a computer storing a program for executing the data transfer method cited in claim 1.
- 20. A recording medium readable by a computer storing a program for executing the data transfer method

cited in claim 2.

Abstract of the disclosure

In a hierarchical network configuration, if transfer of data such as requirements and responses therefrom and thereto are executed in a relay manner between plural manager systems and managed systems on network routes, the requirements and the responses are duplicated in each manager system, thereby presenting a problem of increased amounts of data transfer on the network. The present invention that prevents the data transfer amounts from increasing not only on one route but also on plural routes solves this problem by determining whether to update data on the basis of names of manager system in upper layers, route information and so forth.

FIG.1

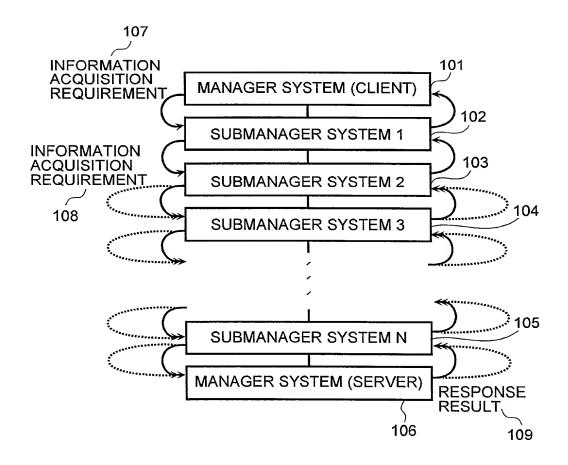


FIG.2

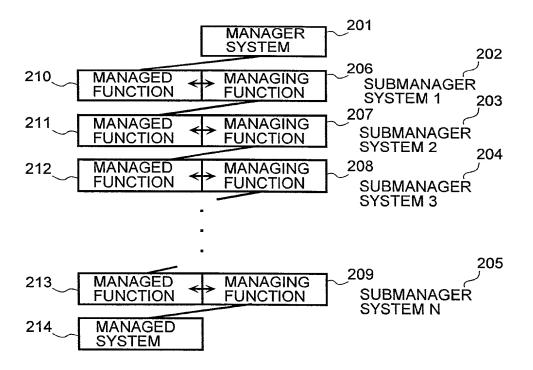
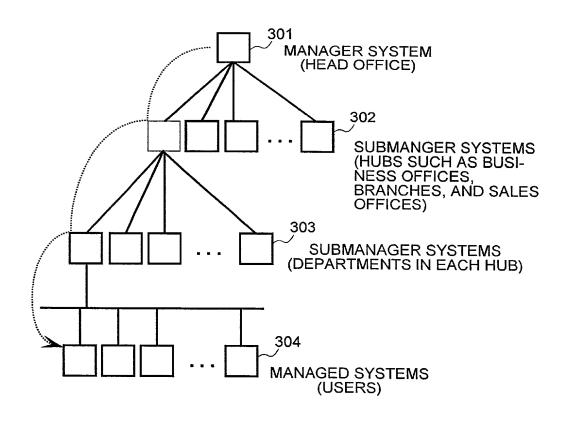


FIG.3



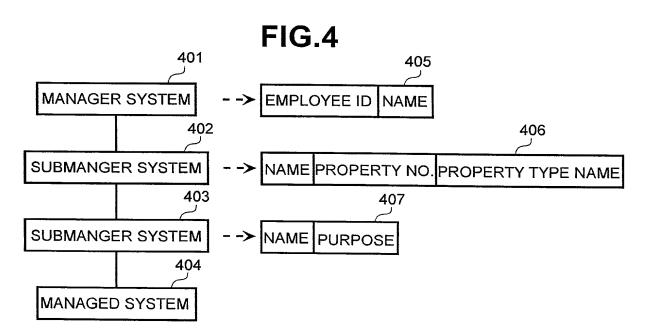


FIG.5

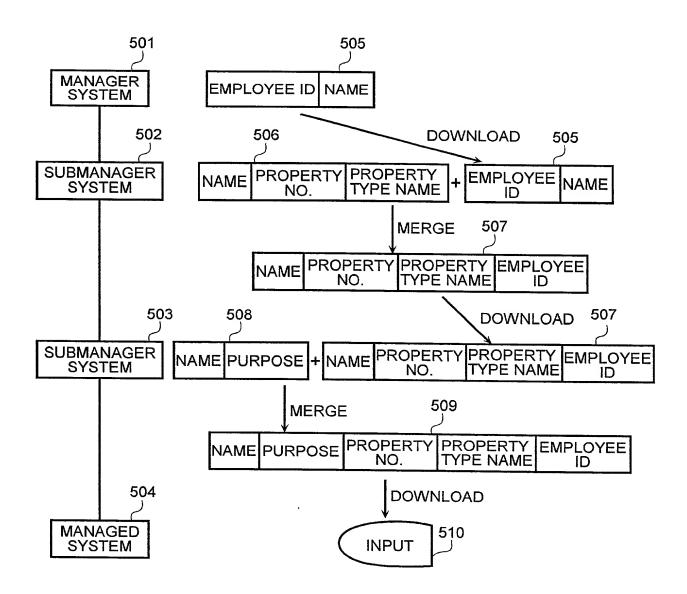


FIG.6

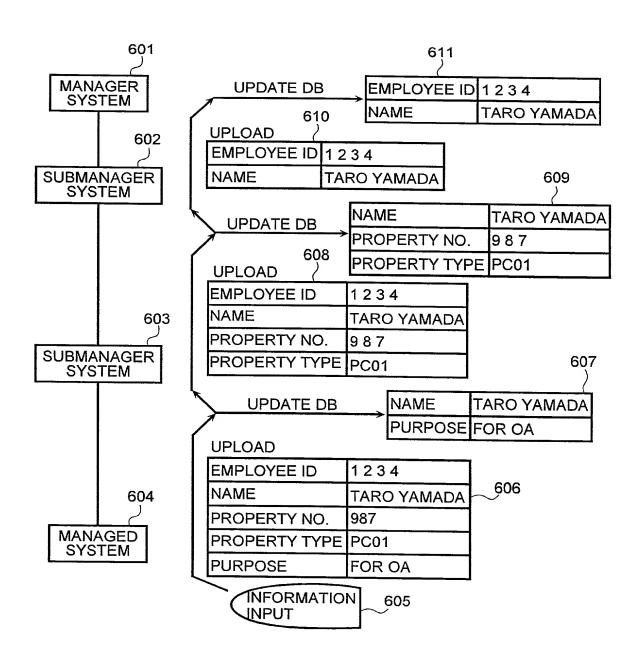


FIG.7

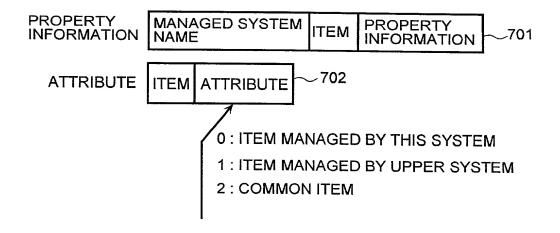


FIG.8

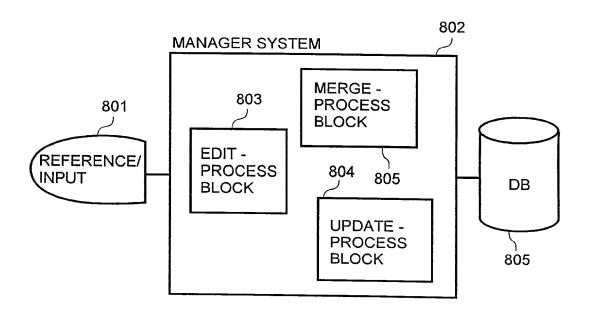


FIG.9

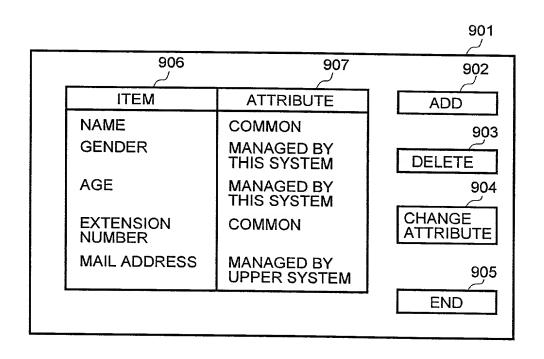


FIG.10

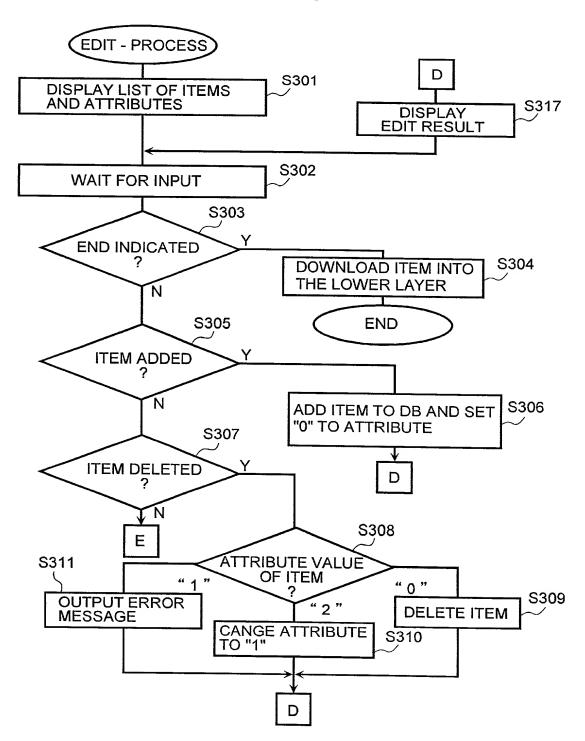
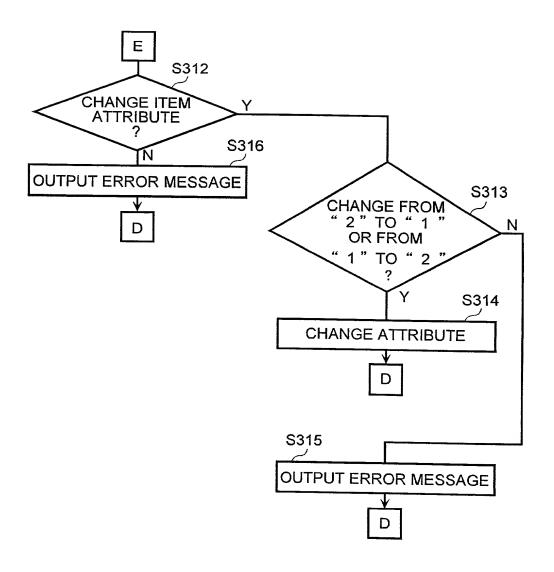
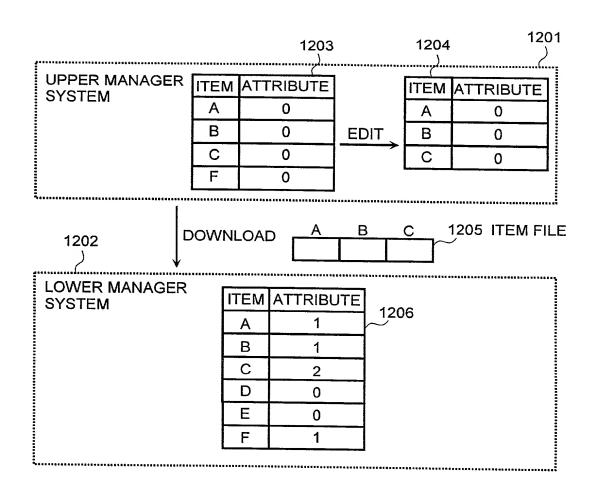


FIG.11





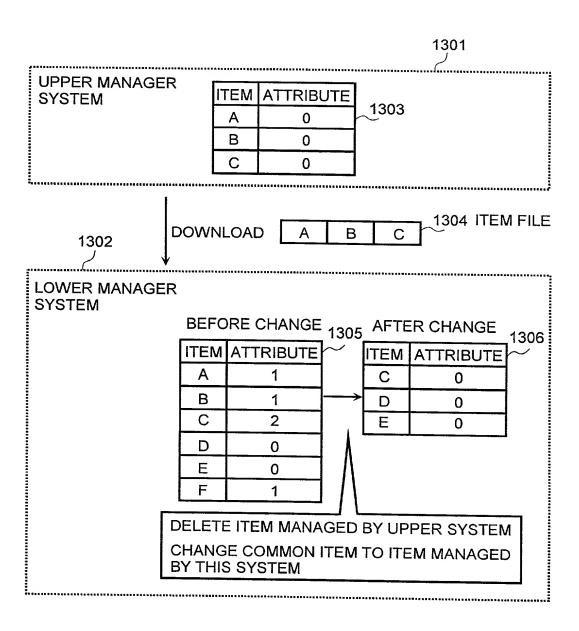


FIG.14

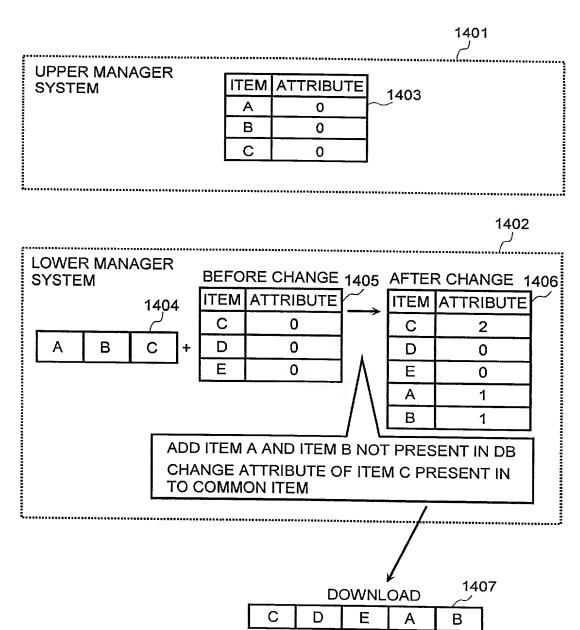


FIG.15

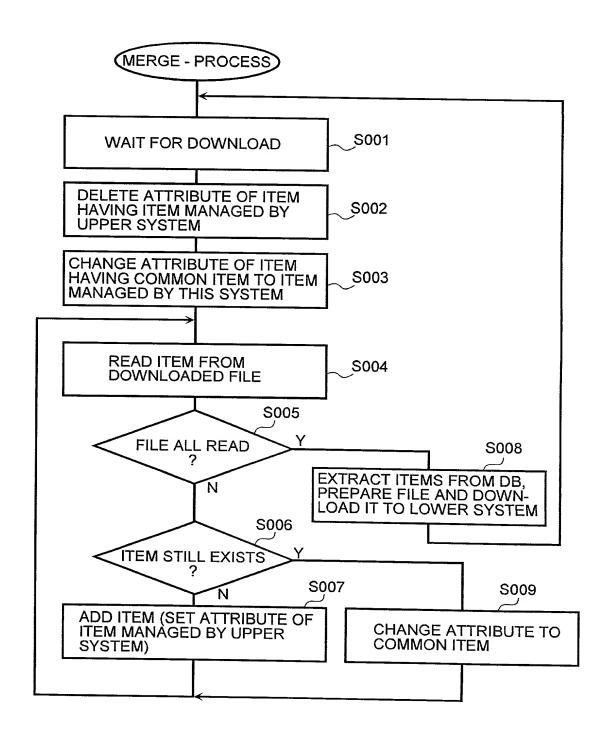


FIG.16

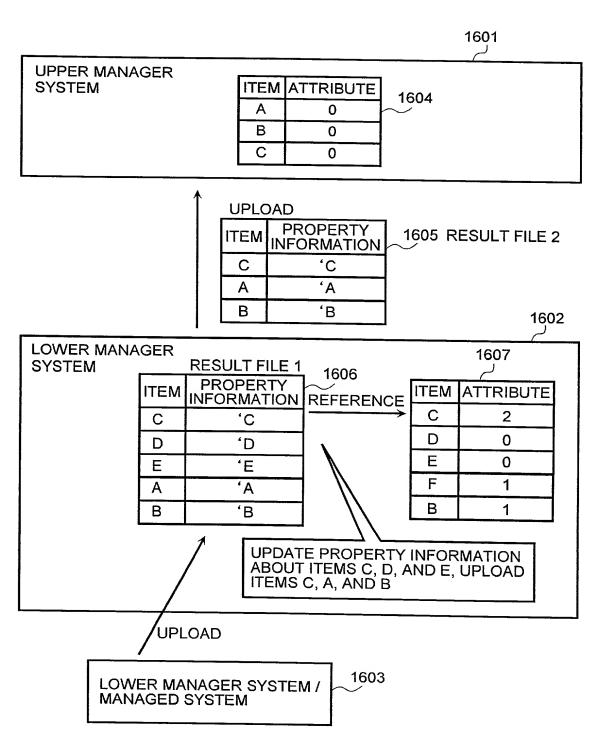


FIG.17

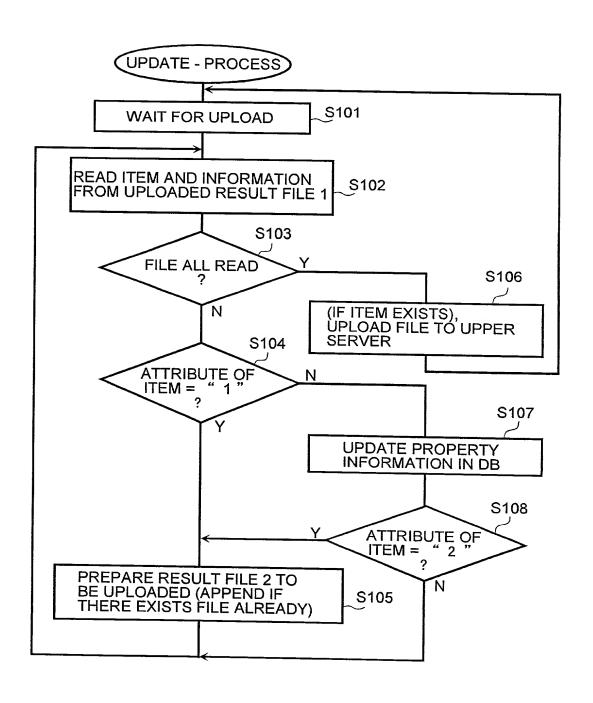


FIG.18

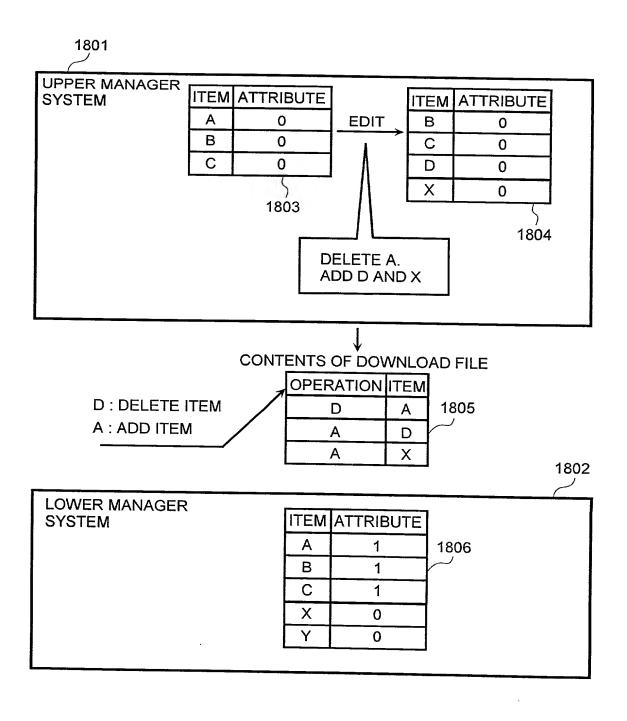


FIG.19

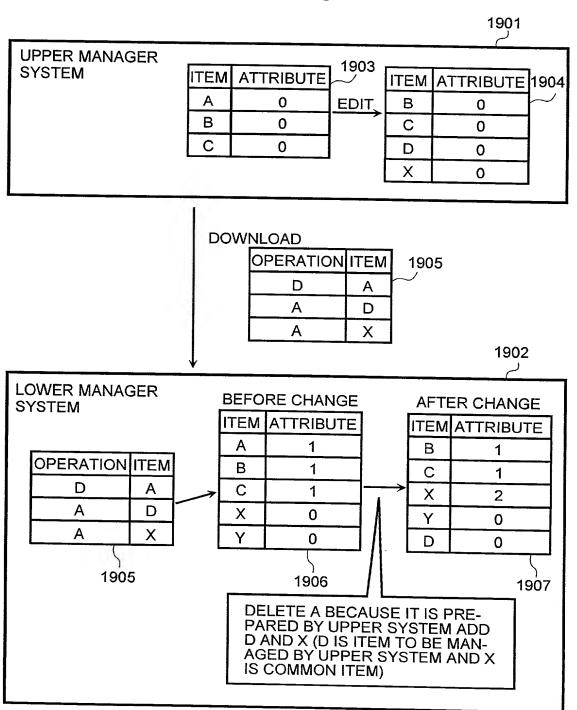


FIG.20

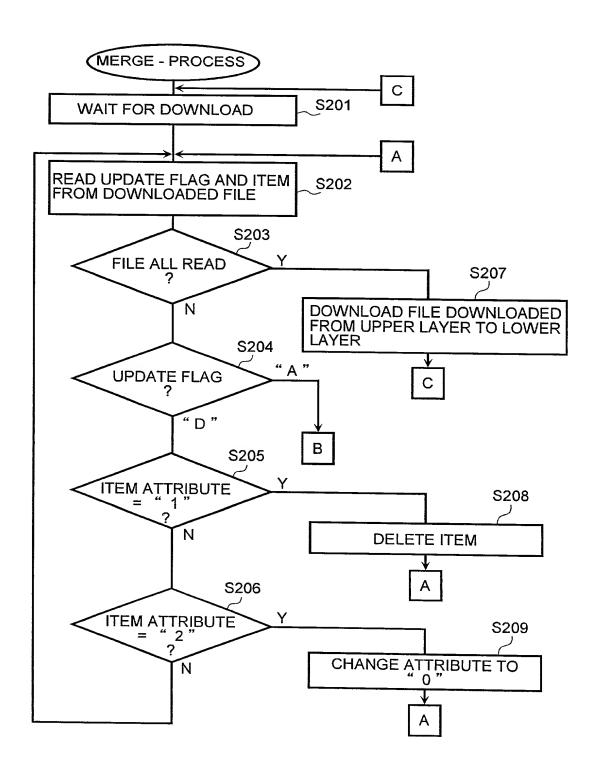


FIG.21



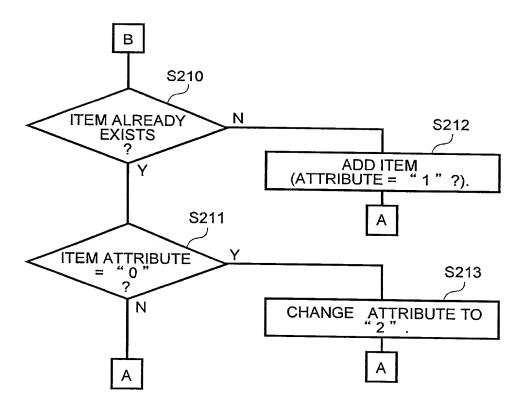


FIG.22

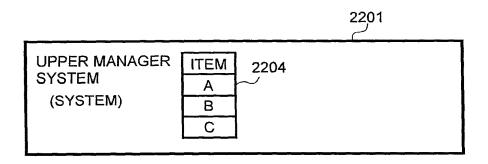

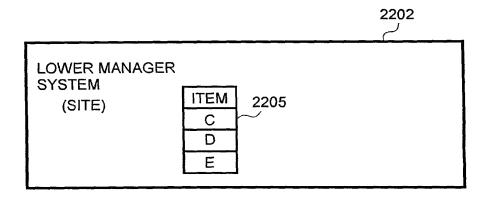

LOWER - LAYER MANAGER SYSTEM / MANAGED SYSTEM

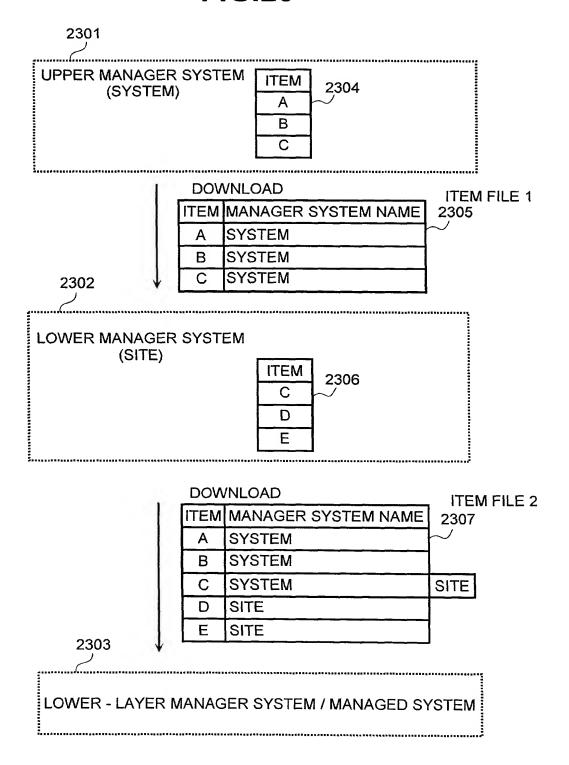
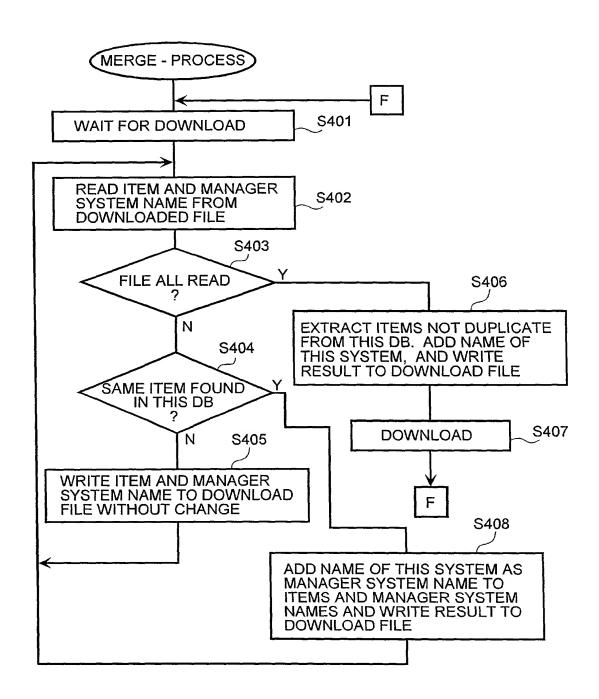


FIG.24




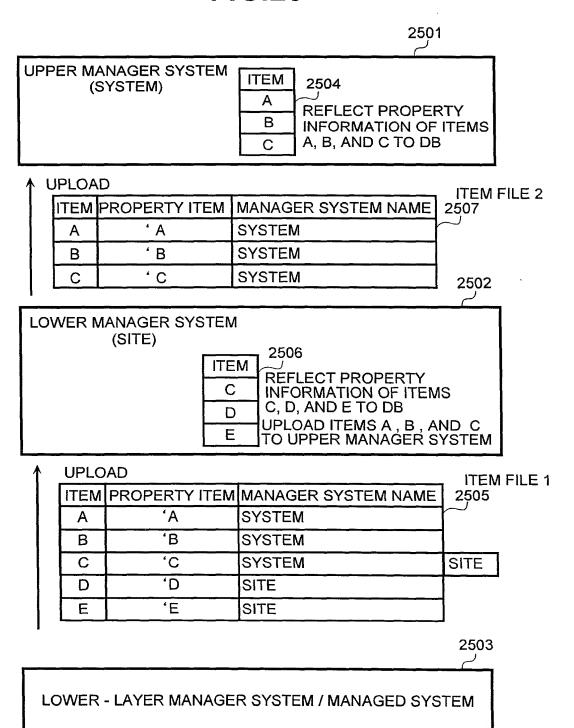


FIG.26

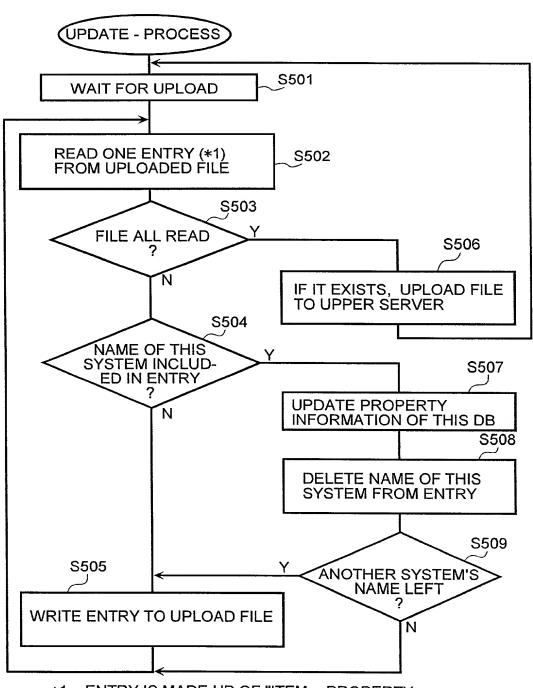

*1 ENTRY IS MADE UP OF "ITEM + PROPERTY INFORMATION + MANAGER SYSTEM NAME"


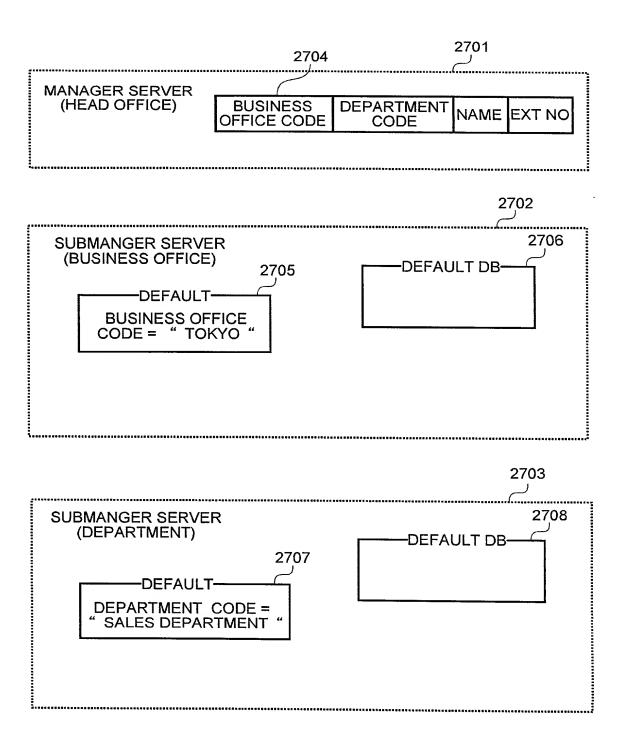


FIG.28 2801 2805 MANAGER SYSTEM (HEAD OFFICE) **BUSINESS** DEPARTMENT NAME EXT NO OFFICE CODE CODE 2802 DOWNLOAD 2807 SUBMANGER SYSTEM (BUSINESS OFFICE) 2806 -DEFAULT DB-**REGISTER DEFAULT** BUSINESS OFFICE CODE = " TOKYO " BUSINESS OFFICE CODE = " TOKYO " PREPARE ITEM 2808 DEPARTMENT NAME EXT NO CODE 2803 DOWNLOAD SUBMANAGER SYSTEM 2810 (DEPARTMENT) 2809 DEFAULT DB-DEFAULT-**REGISTER** DEPARTMENT CODE = SALES DEPARTMENT DEPARTMENT CODE = SALES DEPARTMENT PREPARE ITEM 2811 NAME EXT NO DOWNLOAD MANAGED SYSTEM ~ 2804

FIG.29

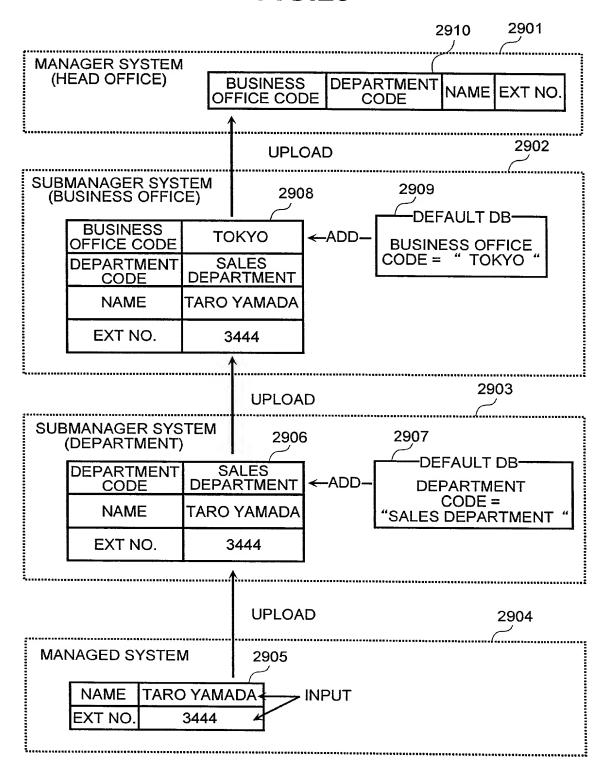

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

he subject matter which is claimed an DATA TRANSFER	METHOD, AE	PPARATUS, AND	RECORDING	MEDIUM	FOR	USE	IN
HIERARCHICAL S	YSTEM	<u> </u>					•
he specification of which (check one	e) XX	is attached hereto.					
		was filed on					
		as Application Serial					
		and was amended or	1(if appl				
I hereby state that I have aims, as amended by any amendmen					cificatio	on, incl	uding th
I acknowledge the duty to with Title 37, Code of Federal Regula	disclose informa	ation which is materi	al to the examinat	tion of this a	oplicatio	on in a	cordanc
I hereby claim foreign prio atent or inventor's certificate liste ertificate having a filing date before	d below and ha	ave also identified be	elow any foreign	19 of any fo application f	oreign a For pate	pplicat ent or	ion(s) fo inventor
rior Foreign Application(s)					Prior	ity Cla	imed
P11-18011	Japan		27/1/19	99	x		
(Number)	(Co	untry)	(Day/Month/Ye	ar Filed)	Yes		No
(Number)	(Cor	untry)	(Day/Month/Ye	ear Filed)	Yes		No
(Number)	(Co	untry)	(Day/Month/Ye	ear Filed)	Yes		No
(Number)	(Co	untry)	(Day/Month/Ye	ear Filed)	Yes		Nó
(Number)	(Co	ountry)	(Day/Month/Ye	ear Filed)	Yes		No
(Number)	(Co	ountry)	(Day/Month/Y	ear Filed)	Yes		No
I hereby claim the benefit and, insofar as the subject matter of in the manner provided by the first information as defined in Title 37, application and the national or PCT	f each of the cla paragraph of Tit Code of Federa	aims of this application at the 35, United States of Regulations, §1.5	on is not disclosed Code, §112,I ackr 6(a) which occurre	in the prior I nowledge the	Jnited S duty to	States a disclo	applications se mater
(Application Serial No.)	(Fili	ing Date)	(Status:	patented, pen	ding, aba	ndoned)
(Application Serial No.)	(Fili	ing Date)	(Status: patented, pending, abandoned)				
(Application Serial No.)	(Fil	ing Date)	(Status: patented, pending, abandoned))	
(Application Serial No.)	(Fil	ing Date)	(Status: patented, pending, abandoned)			i)	

I hereby appoint as principal attorneys; Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; Stanley A. Wal, Reg. No. 26,432; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621 to prosecute and transact all business connected with this application and any related United States application and international applications. Please direct all communications to the following address:

Antonelli, Terry, Stout & Kraus Suite 1800 1300 North Seventeenth Street Arlington, Virginia 22209 Telephone: (703) 312-6600 Fax: (703) 312-6666

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United State Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

	(Full Name)	(Signature)			
Date January 7,2000	Inventor <u>Hiromi Sutou</u>	Hiromi Suton			
Residence Same as post	office adress	Citizenship Japan			
Post Office Address Parkside		3,Totsuka-cho,totsuka-ku,			
Date	InventorYokohama-shi,Kanagawa-ken,Japan				
Residence		Citizenship			
Post Office Address					
Date	Inventor				
Residence		Citizenship			
Post Office Address					
Date	Inventor				
Residence		Citizenship			
Post Office Address	*****				
Date	Inventor				
Residence		Citizenship			
Post Office Address					
Date	Inventor				
Residence		Citizenship			
Post Office Address	NATION AND ADDRESS OF THE PROPERTY OF THE PROP				
Date	Inventor				
Residence	7-77-74-00-44-44-4	Citizenship			
Post Office Address	2/48 4				
Date	Inventor				
Residence	part of and any	Citizenship			
Post Office Address	<u> </u>				
Date	Inventor				
Residence		Citizenship			
Post Office Address					
Date	Inventor				
Residence		Citizenship			
Post Office Address					